

WINMILE-S



FEATURES

- Technically advanced compound.
- Symmetrical Straight groove pattern.

BENEFITS

- Gives higher mileage & high fuel efficiency.
- Precise steering & High Mileage.

SKU	Load Index	Speed Rating	PR	Position	Rim Size	OD (mm)	SW (mm)	Tread Depth (mm)	Tread Width (mm)	Fuel efficiency class	Wet grip class	Noise	Regroove	M+S	3PMS
315/70 R22.5 WINMILE-S	156/150 (154/150)	L (M)	18	Steer	9.00	1007	314	15.0	258	C	B	71 A	Yes	Yes	Yes
315/80 R22.5 WINMILE-S	156/150 (154/150)	L (M)	20	Steer	9.00	1084	312	16.3	257	C	B	71 A	Yes	Yes	Yes
385/65R22.5 WINMILE-S	164 (158)	K(L)	20	Steer	11.75	1060	378	15.4	302	C	B	B	Yes	Yes	Yes
315/60R22.5 WINMILE-S	154/148	L	20	Steer	9.75	951	315	12.5	268	C	B	B	Yes	Yes	Yes
385/55R22.5 WINMILE-S	164(158)	K(L)		Under Dev -											




WINMILE-S




WINMILE-S




»»»»»  
**WINMILE-X3 AW**

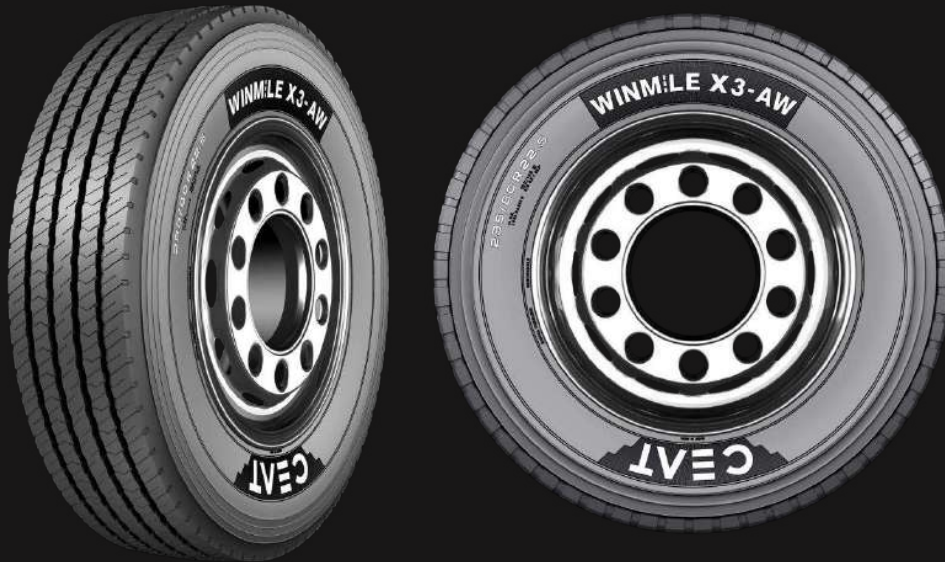



**FEATURES**

 High Abrasion Resistance Tread Compound.

 Groove Base Protector in Centre and Shoulder Ribs.

**BENEFITS**

 High Mileage, Enhanced Durability.

 Cut & Chip Resistance.

SKU	Load Index	Speed Rating	PR	Position	Rim Size	OD (mm)	SW (mm)	Tread Depth (mm)	Tread Width (mm)	Fuel efficiency class	Wet grip class	Noise	Regroove	M+S	3PMS
295/80 R225 WINMILE-X3 AW	154/149	M	18	All Wheel	9.00	1054	302	16.1	233	C	B	68 A	Yes	Yes	Yes



WINMILE-X3 AW



WINMILE-X3 AW



WINMILE-X3 AW



# WINMILE -R



Size	Pattern	Load Capacity Index	Speed Category symbol	Rim Size	PR	SW	OD	Tread Depth	Tread Width	Fuel efficiency class	Wet grip class	Noise	Regroovable	M+S	3PMS
11R22.5 WINMILE-R TL 16PR	Steer	148/145	L	8.25	16	282	1050	15.5	214	D	B	71 B	Yes	Yes	No



WINMILE-D

FEATURES

- Optimized Groove Geometry.
- Optimized Tread Design and Balanced Pressure Distribution.

BENEFITS

- Minimum Cut & Chip and Casing Protection.
- High Mileage and Superior Traction under All Weather Conditions.

SKU	Load Index	Speed Rating	PR	Position	Rim Size	OD (mm)	SW (mm)	Tread Depth (mm)	Tread Width (mm)	Fuel efficiency class	Wet grip class	Noise	Regroove	M+S	3PMS
315/70 R22.5 WINMILE-D	154/150 (152/148)	L (M)	18	Drive	9.00	1015	313	19.0	265	D	B	75 B	Yes	Yes	Yes
315/80 R22.5 WINMILE-D	156/150 (154/150)	L (M)	20	Drive	9.00	1089	314	20.0	266	C	B	75 B	Yes	Yes	Yes
295/60 R22.5 WINMILE-D	150/147	L	18	Drive	9.00	930	296	19.0	259	D	B	B	Yes	Yes	Yes



WINMILE-D




WINMILE-D



WINMILE-D



WINSUPER-X3 D

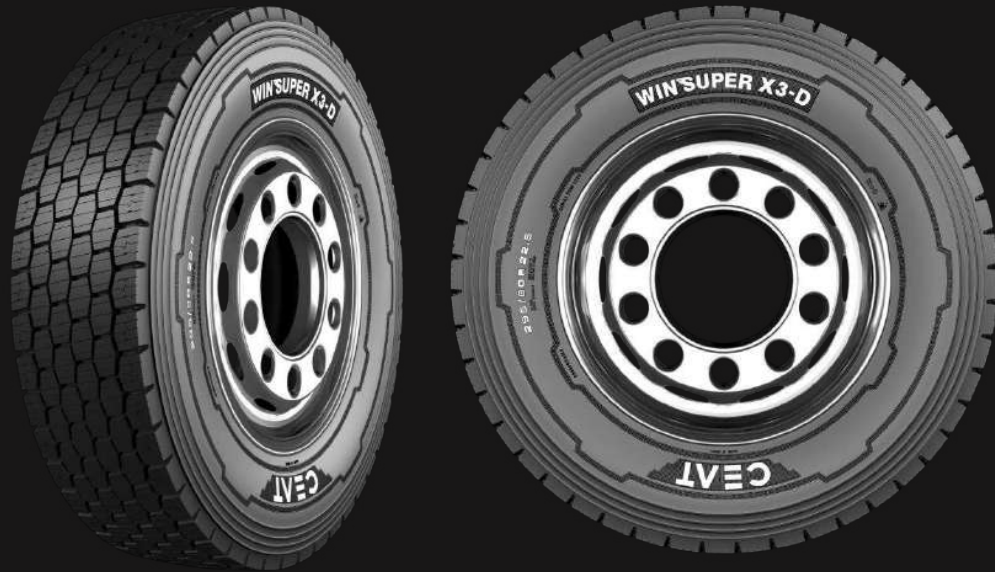

FEATURES



3-D Block Structure for uniform Pressure Distribution.



Advanced process with high abrasion resistance compound.

BENEFITS



High Traction & Uniform Tread Wear.



High Fuel Efficiency & High Mileage.

SKU	Load Index	Speed Rating	PR	Position	Rim Size	OD (mm)	SW (mm)	Tread Depth (mm)	Tread Width (mm)	Fuel efficiency class	Wet grip class	Noise	Regroove	M+S	3PMS
295/80 R22.5 WINSUPER-X3 D	154/149	M	18	Drive	9.00	1059	306	20.1	250	D	B	71 A	Yes	Yes	Yes



WINSUPER-X3 D



WINSUPER-X3 D



WINSUPER-X3 D



# PRO B 10

Open pattern with excellent Traction on City Regional and Hilly Roads



Reinforced Bead Area with Better Rubber Distribution



Reinforced belt package for better toughness



Excellent performance in high heat condition

SIZE	PLY RATING	OVERALL DIAMETER mm	SIDEWALL mm	TREAD DEPTH mm	RIM SIZE inch	LOAD/SPEED INDEX
315/70 R 22.5	16	1029	315	22.1	9.0 x 22.5	152/148 M
315/80 R 22.5	18	1089	316	21.1	9.0 x 22.5	154/150 M



FITMENT POSITION



WINMILE-T

FEATURES



Wide & Solid Shoulder Ribs.



Balanced Pressure Distribution.

BENEFITS



Improved Stability.



Uniform Wear & High Mileage.

SKU	Load Index	Speed Rating	PR	Position	Rim Size	OD (mm)	SW (mm)	Tread Depth (mm)	Tread Width (mm)	Fuel efficiency class	Wet grip class	Noise	Regroove	M+S	3PMS
385/55 R22.5 WINMILE-T	160 (158)	K (L)	20	Trailer	11.75	992	384	14.1	331	C	B	70 A	Yes	Yes	Yes
385/65 R22.5 WINMILE-T	164(158)	K(L)	20	Trailer	11.75	1061	378	16.0	309	B	B	70 A	Yes	Yes	Yes

WINMILE-T




WINMILE-T




WINMILE-T



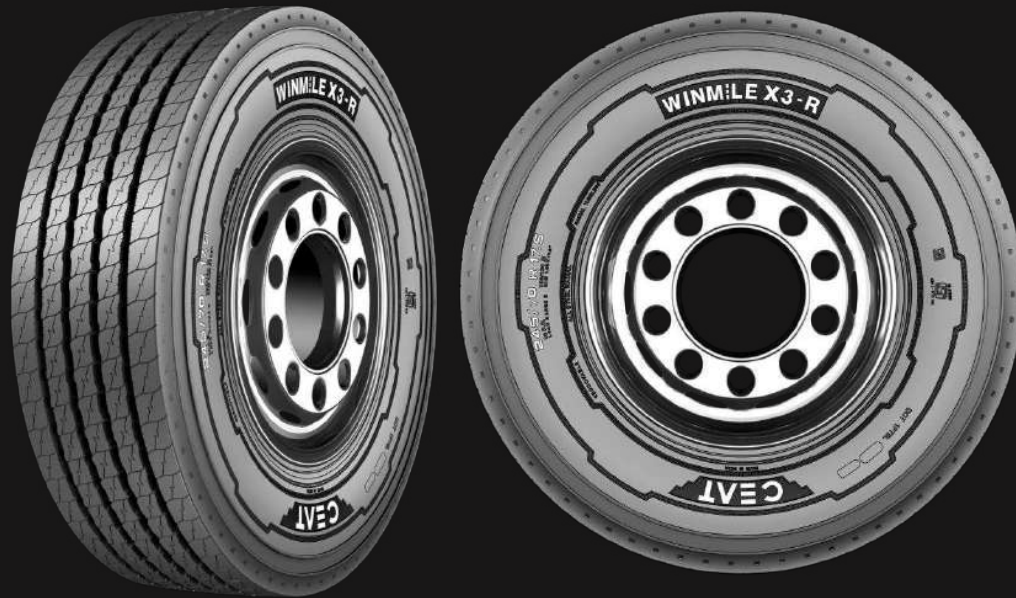



WINMILE-X3 R


FEATURES

 Technically advanced compound.

 Symmetrical Straight groove pattern.

BENEFITS

 Gives higher mileage & high fuel efficiency.

 Precise steering & High Mileage.

SKU	Load Index	Speed Rating	PR	Position	Rim Size	OD (mm)	SW (mm)	Tread Depth (mm)	Tread Width (mm)	Fuel efficiency class	Wet grip class	Noise	Regroove	M+S	3PMS
215/75 R17.5 WINMILE-X3 R	128/126 (135/133)	M(K)	16	Steer(Trailer)	6.00	767	213	13.3	181	D	A	69 A	Yes	Yes	Yes
235/75 R17.5 WINMILE-X3 R	132/130 (143/141)	M(K)	16	Steer(Trailer)	6.75	803	235	13.8	201	D	A	69 A	Yes	Yes	Yes
245/70 R17.5 WINMILE-X3 R	136/134 (143/141)	M(J)	16	Steer(Trailer)	7.50	791	246	14.7	212	D	A	69 A	Yes	Yes	Yes



WINMILE-X3 R




WINMILE-X3 R



WINMILE-X3 R



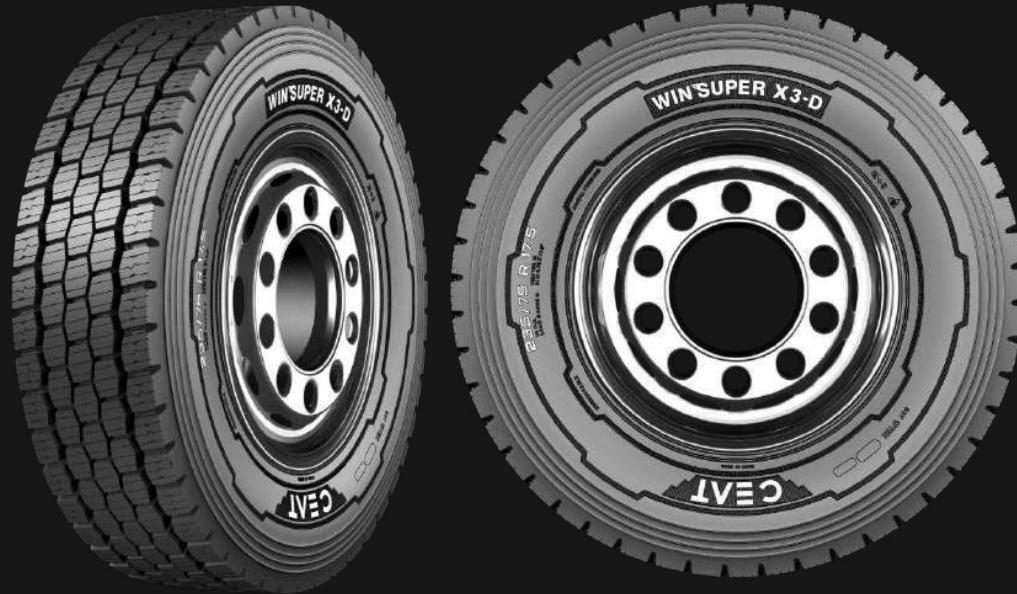

# WINSUPER-X3 D

## FEATURES



3-D Block Structure for uniform Pressure Distribution.



Technically advanced compound and process.

## BENEFITS



High Traction & Uniform Tread Wear.



High Fuel Efficiency.

SKU	Load Index	Speed Rating	PR	Position	Rim Size	OD (mm)	SW (mm)	Tread Depth (mm)	Tread Width (mm)	Fuel efficiency class	Wet grip class	Noise	Regroove	M+S	3PMS
215/75 R17.5 WINSUPER-X3 D	126/124	M	16	Drive	6.00	768	214	14.5	178	D	B	69 A	Yes	Yes	Yes
235/75 R17.5 WINSUPER-X3 D	132/130	M	16	Drive	6.75	803	235	16	201	D	B	69 A	Yes	Yes	Yes



WINSUPER-X3 D



WINSUPER-X3 D



WINSUPER-X3 D



»»»»»  
WINMILE- AW



Wider shoulder rib with continuous center rib

Traction & stability during manoeuvre with higher tyre life



Weather resistant compound with super tensile steel body ply

Durable casing



Scrub resistance sidewall  
Higher Retreadability

SKU	Load Index	Speed Rating	PR	Position	Rim Size	OD (mm)	SW (mm)	Tread Depth (mm)	Tread Width (mm)	Fuel efficiency class	Wet grip class	Noise	Regroove	M+S	3PMS
245/70 R19.5 WINMILE - AW	141/140 (136/134)	J(M)		Steer(Trailer)	7.50	841	248	14.0	212	D	B	70 A	Yes	Yes	Yes



WINMILE- AW



WINMILE- AW



WINMILE- AW



# ON/OFF Range



Size	Pattern	Rim Size	PR	Load Capacity Index	Speed Category symbol	SW (mm)	OD (mm)	Tread Depth (mm)	Tread Width(mm )	Fuel efficiency class	Wet grip class	Noise	3PMSF	Regroovable	M+S
295/80R22.5 WINLOAD X5-D 152/148K	Drive	9.00	16	152/148	K	296	1062	21.8	243	D	B	73 B	Yes	Yes	Yes
11R22.5 WINLOAD-AW TL 16PR	All Wheel	8.25	16	148/145	L	285	1045	15.1	214	D	A	70 A	Yes	Yes	Yes
13R22.5 WINLOAD AW 158/156K	All Wheel	9.75	20	158/156	K	320	1118	17.0	260	D	A	71 A	Yes	Yes	Yes
13R22.5 WINLOAD D 158/156K	Drive	9.75	20	158/156	K	320	1126	21.0	260	D	A	73 B	Yes	Yes	Yes
315/80R22.5 WINLOAD AW 158/156K	All Wheel	9.00	20	158/156	K	313	1084	16.8	264	D	A	71 A	Yes	Yes	Yes
315/80R22.5 WINLOAD D 158/156K	Drive	9.00	20	158/156	K	315	1093	21.0	273	D	A	73 B	Yes	Yes	Yes
385/65R22.5 WINLOAD AW 164K	All Wheel	11.75	20	164 (158)	K (L)	382	1080	17.5	310	C	A	71 A	Yes	Yes	Yes

# CEAT TBR PRODUCT RANGE

Srl No	Tyre Class	SAP Code	Application	Size	Pattern	Rim Size	PR	SW	OD	Tread Depth	Tread Width	Load Capacity Index	Speed Category symbol	Fuel efficiency class	Wet grip class	External rolling noise class	Noise	Regroovable	M+S (Yes/No)	3PMS (Yes/No)
1	C3	106627	Highway	215/75R17.5 WINMILE X3-R	Steer (Trailer)	6.00	16	213	767	13.3	181	135/133 (128/126)	K (M)	D	A	Single wave	69	Yes	Yes	Yes
2	C3	107229	Highway	215/75R17.5 WINSUPER X3-D TL	Drive	6.00	16	214	768	14.5	178	135/133 (126/124)	K(M)	D	B	Single wave	71	Yes	Yes	Yes
3	C3	107334	Highway	235/75R17.5 WINMILE X3 R	Steer (Trailer)	6.75	16	235	803	13.8	201	143/141 (132/130)	K(M)	D	A	Single wave	69	Yes	Yes	Yes
4	C3	107333	Highway	235/75R17.5 WINSUPER X3 D	Drive	6.75	16	233	806	16.0	201	130/132	M	D	B	Single wave	71	Yes	Yes	Yes
5	C3	107344	Highway	245/70R17.5 WINMILE X3-R TL	Steer (Trailer)	7.50	16	246	791	14.7	212	143/141 (136/134)	J (M)	D	A	Single wave	69	Yes	Yes	Yes
6	C3	113597	Highway	245/70R19.5 Winmile AW	Steer (Trailer)	7.50	16	248	841	14.0	212	141/140 (136/134)	J(M)	D	B	Single wave	70	Yes	Yes	Yes
7	C3	104107	Highway	11R22.5 WINMILE-R TL 16PR	Steer	8.25	16	282	1050	15.5	214	148/145	L	D	B	Double Wave	71	Yes	Yes	No
8	C3	113286	Highway	295/60R22.5 Winmile D 150/147L 18PR	Drive	9.00	18	296	930	19.0	259	150/147	L	D	B	Double Wave	75	Yes	Yes	Yes
9	C3	112769	Highway	295/80R22.5 WINMILE X3-AW 154/149M 18PR	Steer	9.00	18	307	1059	16.1	233	154/149 M	M	D	B	Single wave	69	Yes	Yes	Yes
10	C3	107343	Highway	295/80R22.5 WINSUPER X3-D 154/149M 18PR	Drive	9.00	18	306	1059	20.1	250	154/149 M	M	D	B	Single wave	71	Yes	Yes	Yes
11	C3	113287	Highway	315/60R22.5 Winmile S 154/150L 20PR	Steer	9.75	20	315	951	12.5	268	154/150	L	C	B	Double Wave	72	Yes	Yes	Yes
12	C3	106920	Highway	315/70R22.5 WINMILE-D	Drive	9.00	18	313	1015	19.0	265	154/150 (152/148)	L (M)	D	B	Double wave	75	Yes	Yes	Yes
13	C3	106324	Highway	315/70R22.5 WinMile-S	Steer	9.00	18	314	1007	15.0	258	156/150 (154/150)	L (M)	C	B	Single wave	71	Yes	Yes	Yes
14	C3	104834	Highway	315/80R22.5 PRO B10 TL 18PR	Drive	9.00	18	317	1089	21.0	271	154/150	M	D	B	Double Wave	74	Yes	Yes	Yes
15	C3	106919	Highway	315/80R22.5 WINMILE-D	Drive	9.00	20	314	1089	20.0	266	156/150 (154/150)	L (M)	C	B	Double wave	75	Yes	Yes	Yes
16	C3	106439	Highway	315/80R22.5 WINMILE-S	Steer	9.00	20	312	1084	16.3	257	156/150 (154/150)	L (M)	C	B	Single wave	71	Yes	Yes	Yes
17	C3	106392	Highway	385/55R22.5 WinMile-T	Trailer	11.75	20	384	992	14.1	331	160 (158)	K (L)	C	B	Single wave	70	Yes	Yes	Yes
18	C3	113288	Highway	385/65R22.5 Winmile S 164K (158L) 20 PR	Steer	11.75	20	378	1060	15.4	302	164(158)	K(L)	C	B	Double Wave	72	Yes	Yes	Yes
19	C3	113087	Highway	385/65R22.5 WINMILE-T 164K	Trailer	11.75	20	378	1061	16.0	309	164 (158)	K (L)	B	B	Single wave	70	Yes	Yes	Yes
20	C3	106513	Highway	7.50R16 LT RD319 122/118 L	Steer	6.00	14	215	801	11.5	148	122/118	L	D	A	Single wave	70	Yes	Yes	Yes
21	C3	106274	ON/OFF	11R22.5 WINLOAD-AW TL 16PR	All Wheel	8.25	16	285	1045	15.1	214	148/145	L	D	A	Single wave	70	Yes	Yes	No
22	C3	114321	ON/OFF	13R22.5 WINLOAD AW 158/156K	All Wheel	9.75	20	320	1118	17.0	260	158/156	K	D	A	Single Wave	71	Yes	Yes	Yes
23	C3	114322	ON/OFF	13R22.5 WINLOAD D 158/156K	Drive	9.75	20	320	1126	21.0	260	158/156	K	D	A	Double wave	73	Yes	Yes	Yes
24	C3	114532	ON/OFF	295/80R22.5 WINLOAD X5-D 152/148K	Drive	9.00	16	296	1062	21.8	243	152/148	K	D	B	Double Wave	73	Yes	Yes	Yes
25	C3	114325	ON/OFF	315/80R22.5 WINLOAD AW 158/156K	All Wheel	9.00	20	313	1084	16.8	264	158/156	K	D	A	Single Wave	71	Yes	Yes	Yes
26	C3	114324	ON/OFF	315/80R22.5 WINLOAD D 158/156K	Drive	9.00	20	315	1093	21.0	273	158/156	K	D	A	Double wave	73	Yes	Yes	Yes
27	C3	114323	ON/OFF	385/65R22.5 WINLOAD AW 164K	All Wheel	11.75	20	382	1080	17.5	310	164 (158)	K (L)	C	A	Single Wave	71	Yes	Yes	Yes